


Ozone Systems

APEX SERIES BUILDER PACKAGES

The popular Apex Series from ClearWater Tech is perfect for residential, light commercial or any water treatment application with a flow rate of 15 to 80 gpm. Built to customer specifications; all Apex systems are complete integrated ozone systems that are easy to install and maintain. These Corona discharge ozone units are wall-mounted and ready to tie to existing pump lines. Available with capacities ranging from 800 mg/hr to 8.0 g/hr. Wall-mounted and Cabinet Ozone Systems are available for larger, commercial applications. Units can be skid-mounted or combined with other filtration components. Please call for sizing and design assistance.

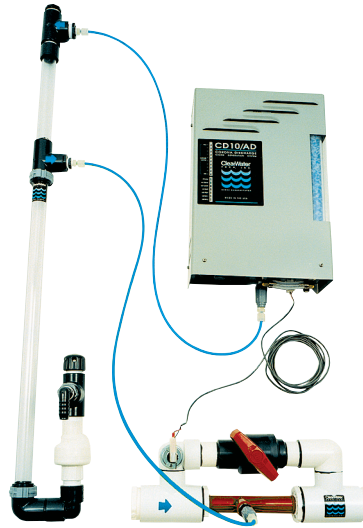

*Apex series II Ozone
Builder Package*



*Apex series IV—
shown with Oxygen
concentrator*

System	Electrical	Ozone Output	Rating
Series II includes: CD 10AD ozone generator with built in air dryer, SCFH (flow meter), injector manifold with pressure switch, check valve assembly, tubing & fittings	Universal 90-260V, 47-63 Hz, 2.2-0.8 amps, 200 watts	1.3 g/hr@ 4 SCFH (dry air) 1% concentration by weight	Residential ponds up to 25,000 gallons with secondary sanitizer
Series III includes: M-15/AD ozone generator with built in air dryer, injector manifold with pressure switch, check valve assembly, vacuum break, SCFH gauges, tubing & fittings	120V 60Hz, 2.6 amps 240V 60Hz, 1.3 amps 220V 50Hz, 1.5 amps 312 watts	2.8 g/hr@ 7 SCFH (dry air) 1% concentration by weight	Residential ponds up to 40,000 gallons with secondary sanitizer
Series IV includes: CD10 ozone generator, workhorse 8C oxygen concentrator, AIF-10 interface box, injector manifold, check valve with residual sanitizer assembly, SCFH vacuum gauge with vacuum switch, tubing & fittings	Ozone Generator: Universal 90-260V, 47-63 Hz, 1.1-0.4 amps, 100 watts Oxygen Concentrator: 120V/ 60 Hz, 3.8 amps 240V / 60 Hz, 2.0 amps 456 watts	4.0 g/hr@ 4 SCFH (PSA oxygen) 3% concentration by weight	Commercial spas up to 5,000 gallons Residential pools up to 55,000 gallons
Series V includes: P-2000 ozone generator, AD22 air dryer with SCFH gauge, injector manifold check valve assembly, vacuum break, tubing & fittings	Ozone Generator: 120V / 60Hz, 2.8 amps 240V / 60 Hz, 1.4 amps 220V / 50 Hz, 2.0 amps 336 watts Air Dryer: 120V/ 60 Hz, 1.0 amps 240V / 60 Hz, 0.5 amps 220V / 50 Hz, 0.6 amps 120 watts	5.6 g/hr@ 14 SCFH (dry air) 1% concentration by weight	Residential & Semicommercial pools up to 65,000 gallons with secondary sanitizer
Series VI includes: CD12 ozone generator, workhorse 8C oxygen concentrator, AIF- 10 interface box injector manifold, check valve assembly, SCFH vacuum gauge with vacuum switch, vacuum break, tubing & fittings	Ozone Generator: Universal 90-260V, 47-63 Hz, 1.1-0.4 amps, 100 watts Oxygen Concentrator: 120V/ 60 Hz, 3.8 amps 240V / 60 Hz, 2.0 amps 456 watts	8.0 g/hr@ 8 SCFH (PSA oxygen) 3% concentration by weight	Residential & Semicommercial pools up to 80,000 gallons with secondary sanitizer